


## Modular Multi-Idler Belt weigher model MBD

- Highly Accurate, Proven and Rugged Design
- Fully Floating weigh carriage for simple calibration
- Cost effective modular design
- Two and four idler configurations
- Integrated test weight receptors or optional lever arm operated stored in place test weights

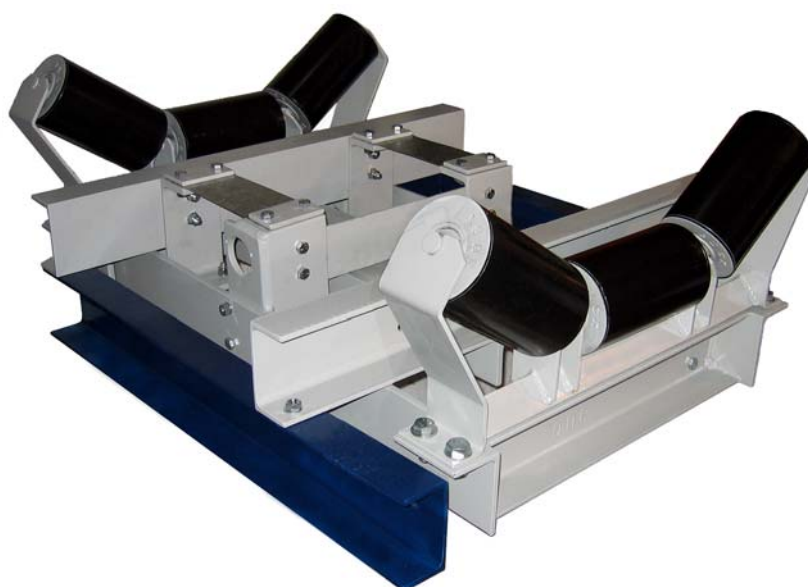

### Application

Multi-Idler Belt Weighers are used for continuous acquisition of flow rates and totalized amounts. They are especially designed for integration into belt conveyors and enable accuracies of up to  $\pm 0.25\%$ . They can be employed for a whole variety of tasks:

- Throughput and consumption measurement in production plants.
- Accountability of stored and retrieved amounts.
- Maximum or Minimum load limit alarms.
- Batching, in loading stations.
- Pre-feeder control.

The rugged design ensures a high degree of reliability and availability.

### Construction

The standard belt weigher comprises:

- Fully floating weighing platform.
- Overload-protected stainless Steel load cell(s) of IP65 construction.
- IP65 Cable junction box in painted mild steel.
- IP65 Tail drum speed sensor.
- Mounting and adjusting bolts.

Options include:



- Weigh quality idler sets with screw adjustment (for precise idler alignment,  $\pm 0.2\text{mm}$ ).
- IP65 Cable junction box in 316 stainless steel and optional speed sensor(s).
- Friction Jockey Wheel running on return belt.

### Operating Principle

The belt weigher comprises load cells measure the load on the weigh length while a speed transducer acquires the belt speed. The controller calculates both the instantaneous load and the totalized amount. Belt weighers designed with a longer weigh length are less prone to errors from the conveyor system. Similarly, wide belts introduce large side forces which cause errors. The MBD is a fully modular system which allows modules to be run in tandem or parallel thus giving a common belt weigher for a wide range of applications. This modular design also results in a lighter construction better suited to the load cells.



## Configurations and Dimensions

### Single module (Dual Idler Configuration)

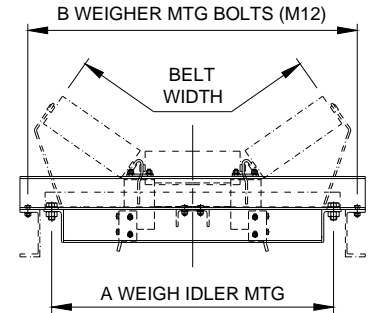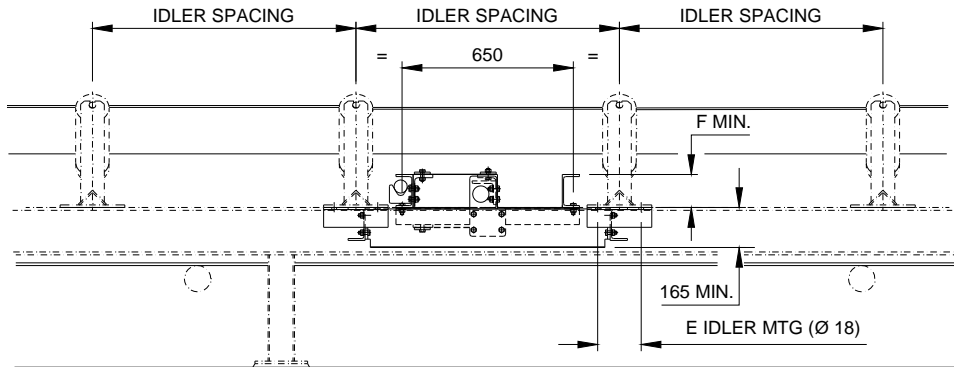

### Multi module Configurations

#### 2MBD (four idler) and MBD2 versions (for belt widths 1600 and above)

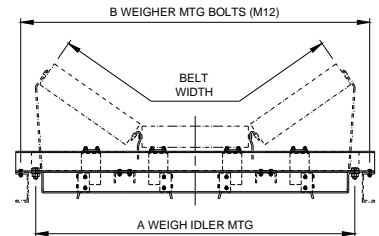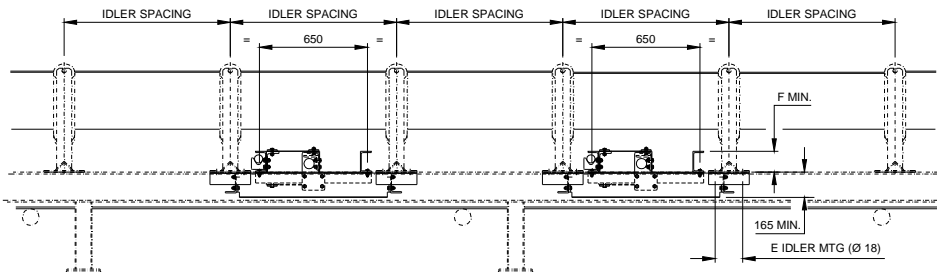

### Standard Models

Model	Accuracy	No. L/C & Modules	Weight (kg)	Belt Width	A	B	E	F
1.MBD.1.500	± 0.5%	1	105	500	570	750	60	130
2.MBD.1.500	± 0.25%	2	210					
1.MBD.1.600	± 0.5%	1	111	600	670	850	60	130
2.MBD.1.600	± 0.25%	2	222					
1.MBD.1.650	± 0.5%	1	114	650	720	900	60	130
2.MBD.1.650	± 0.25%	2	228					
1.MBD.1.750	± 0.5%	1	122	750	820	1000	60	130
2.MBD.1.750	± 0.25%	2	244				140	
1.MBD.1.800	± 0.5%	1	126	800	870	1050	60	130
2.MBD.1.800	± 0.25%	2	252				150	
1.MBD.1.900	± 0.5%	1	132	900	970	1150	60	130
2.MBD.1.900	± 0.25%	2	264				150	
1.MBD.1.1000	± 0.5%	1	138	1000	1070	1250	60	165
2.MBD.1.1000	± 0.25%	2	276				150	
1.MBD.1.1050	± 0.5%	1	157	1050	1120	1300	60	165
2.MBD.1.1050	± 0.25%	2	314				150	
1.MBD.1.1200	± 0.5%	1	169	1200	1270	1450	60	165
2.MBD.1.1200	± 0.25%	2	338				165	
1.MBD.1.1350	± 0.5%	1	184	1350	1470	1650	180	165
2.MBD.1.1350	± 0.25%	2	368					
1.MBD.1.1400	± 0.5%	1	200	1400	1520	1700	200	165
2.MBD.1.1400	± 0.25%	2	400					
1.MBD.1.1500	± 0.5%	1	208	1500	1620	1800	200	165
2.MBD.1.1500	± 0.25%	2	412					
1.MBD.2.1600	± 0.5%	2	282	1600	1820	2000	240	165
2.MBD.2.1600	± 0.25%	4	564					
1.MBD.2.1800	± 0.5%	2	295	1800	2020	2200	240	195
2.MBD.2.1800	± 0.25%	4	590					
1.MBD.2.2000	± 0.5%	2	315	2000	2220	2400	280	205
2.MBD.2.2000	± 0.25%	4	630					
1.MBD.2.2200	± 0.5%	2	330	2200	2320	2600	280	205
2.MBD.2.2200	± 0.25%	4	660					
1.MBD.2.2500	± 0.5%	2	350	2400	2520	2800	350	205
2.MBD.2.2500	± 0.25%	4	700					
1.MBD.2.2500	± 0.5%	2	360	2500	2720	2900	350	205
2.MBD.2.2500	± 0.25%	4	720					

Standard Idler spacings 1000, 1250 & 1500mm. Custom designs to suit non standard conveyor stringers, idler spacing and idler dimensions are also available on request. Accuracy quoted is based on maximum belt speed of 5m/s and is subject to confirmation by formal quotation. Belt weighers should be installed in accordance with the operating and installation manuals. Dimensions and specifications are subject to change without notice.

